


FR Double-Coated Cloth Tape

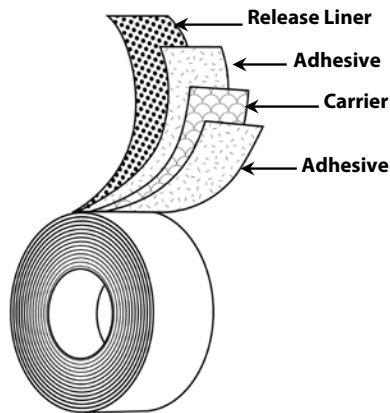

Carrier: Cloth
Adhesive: Rubber
Liner: Blue LDPE
Colors: Natural or Black (adhesive color)

Specifications: FAR 25.853(a), BMS 5-133, BAC5034-4 Sec 5.1.a(1)(b), Douglas DMS 1971, Lockheed LAC C-24-1257, Embraer MEP 06-048. Listed FK05-121 & FK05-197; ABD0031 Paragraph 7.4

Standard Sizes: 48mm x 23M, 72mm x 23M

Applications

- Carpet installation on interior floors and stairs of aircraft
- Acrylic plastic sheeting applications.
- Mounting & holding for general shop & machine handling.

Features

- Cloth reinforcement
- Differential Natural rubber based adhesive
- Boeing, Douglas & Lockheed approvals.

Benefits

- Good strength and elongation for easy tear, application and removal
- Conformable and moisture resistant
- Clean removal from most surfaces
- Aggressive bond for secure hold
- Repositionable adhesive for easy installation
- Meets requirements for use by major aircraft manufacturers as well as major airlines

Physical Properties

	Standard UOM	Metric UOM	Test Method
Total Thickness	15 mils	381 mic	ASTM D-1000
Adhesion to Steel (air)	60 oz/in	6.57 N/cm	PSTC-101
Tensile Strength	55 lb/in	96.32 N/cm	ASTM D-1000
Weight	13 oz/sq yd	472.9 g/m ²	ASTM D-1000
Operating Temperature	40 to 200 °F	4 to 93 °C	
Exiting Time	1.5 sec		FAR 25.853(a)
Burn Length	4.5"		FAR 25.853(a)
Drip Exiting	N/A		FAR 25.853(a)

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F
 Standard Shelf Life (at 25C): 24 months from date of manufacture.

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.